UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SEQUIM QUADRANGLE

WASHINGTON–CLALLAM CO.
7.5 MINUTE SERIES (TOPOGRAPHIC-BATHYMETRIC)

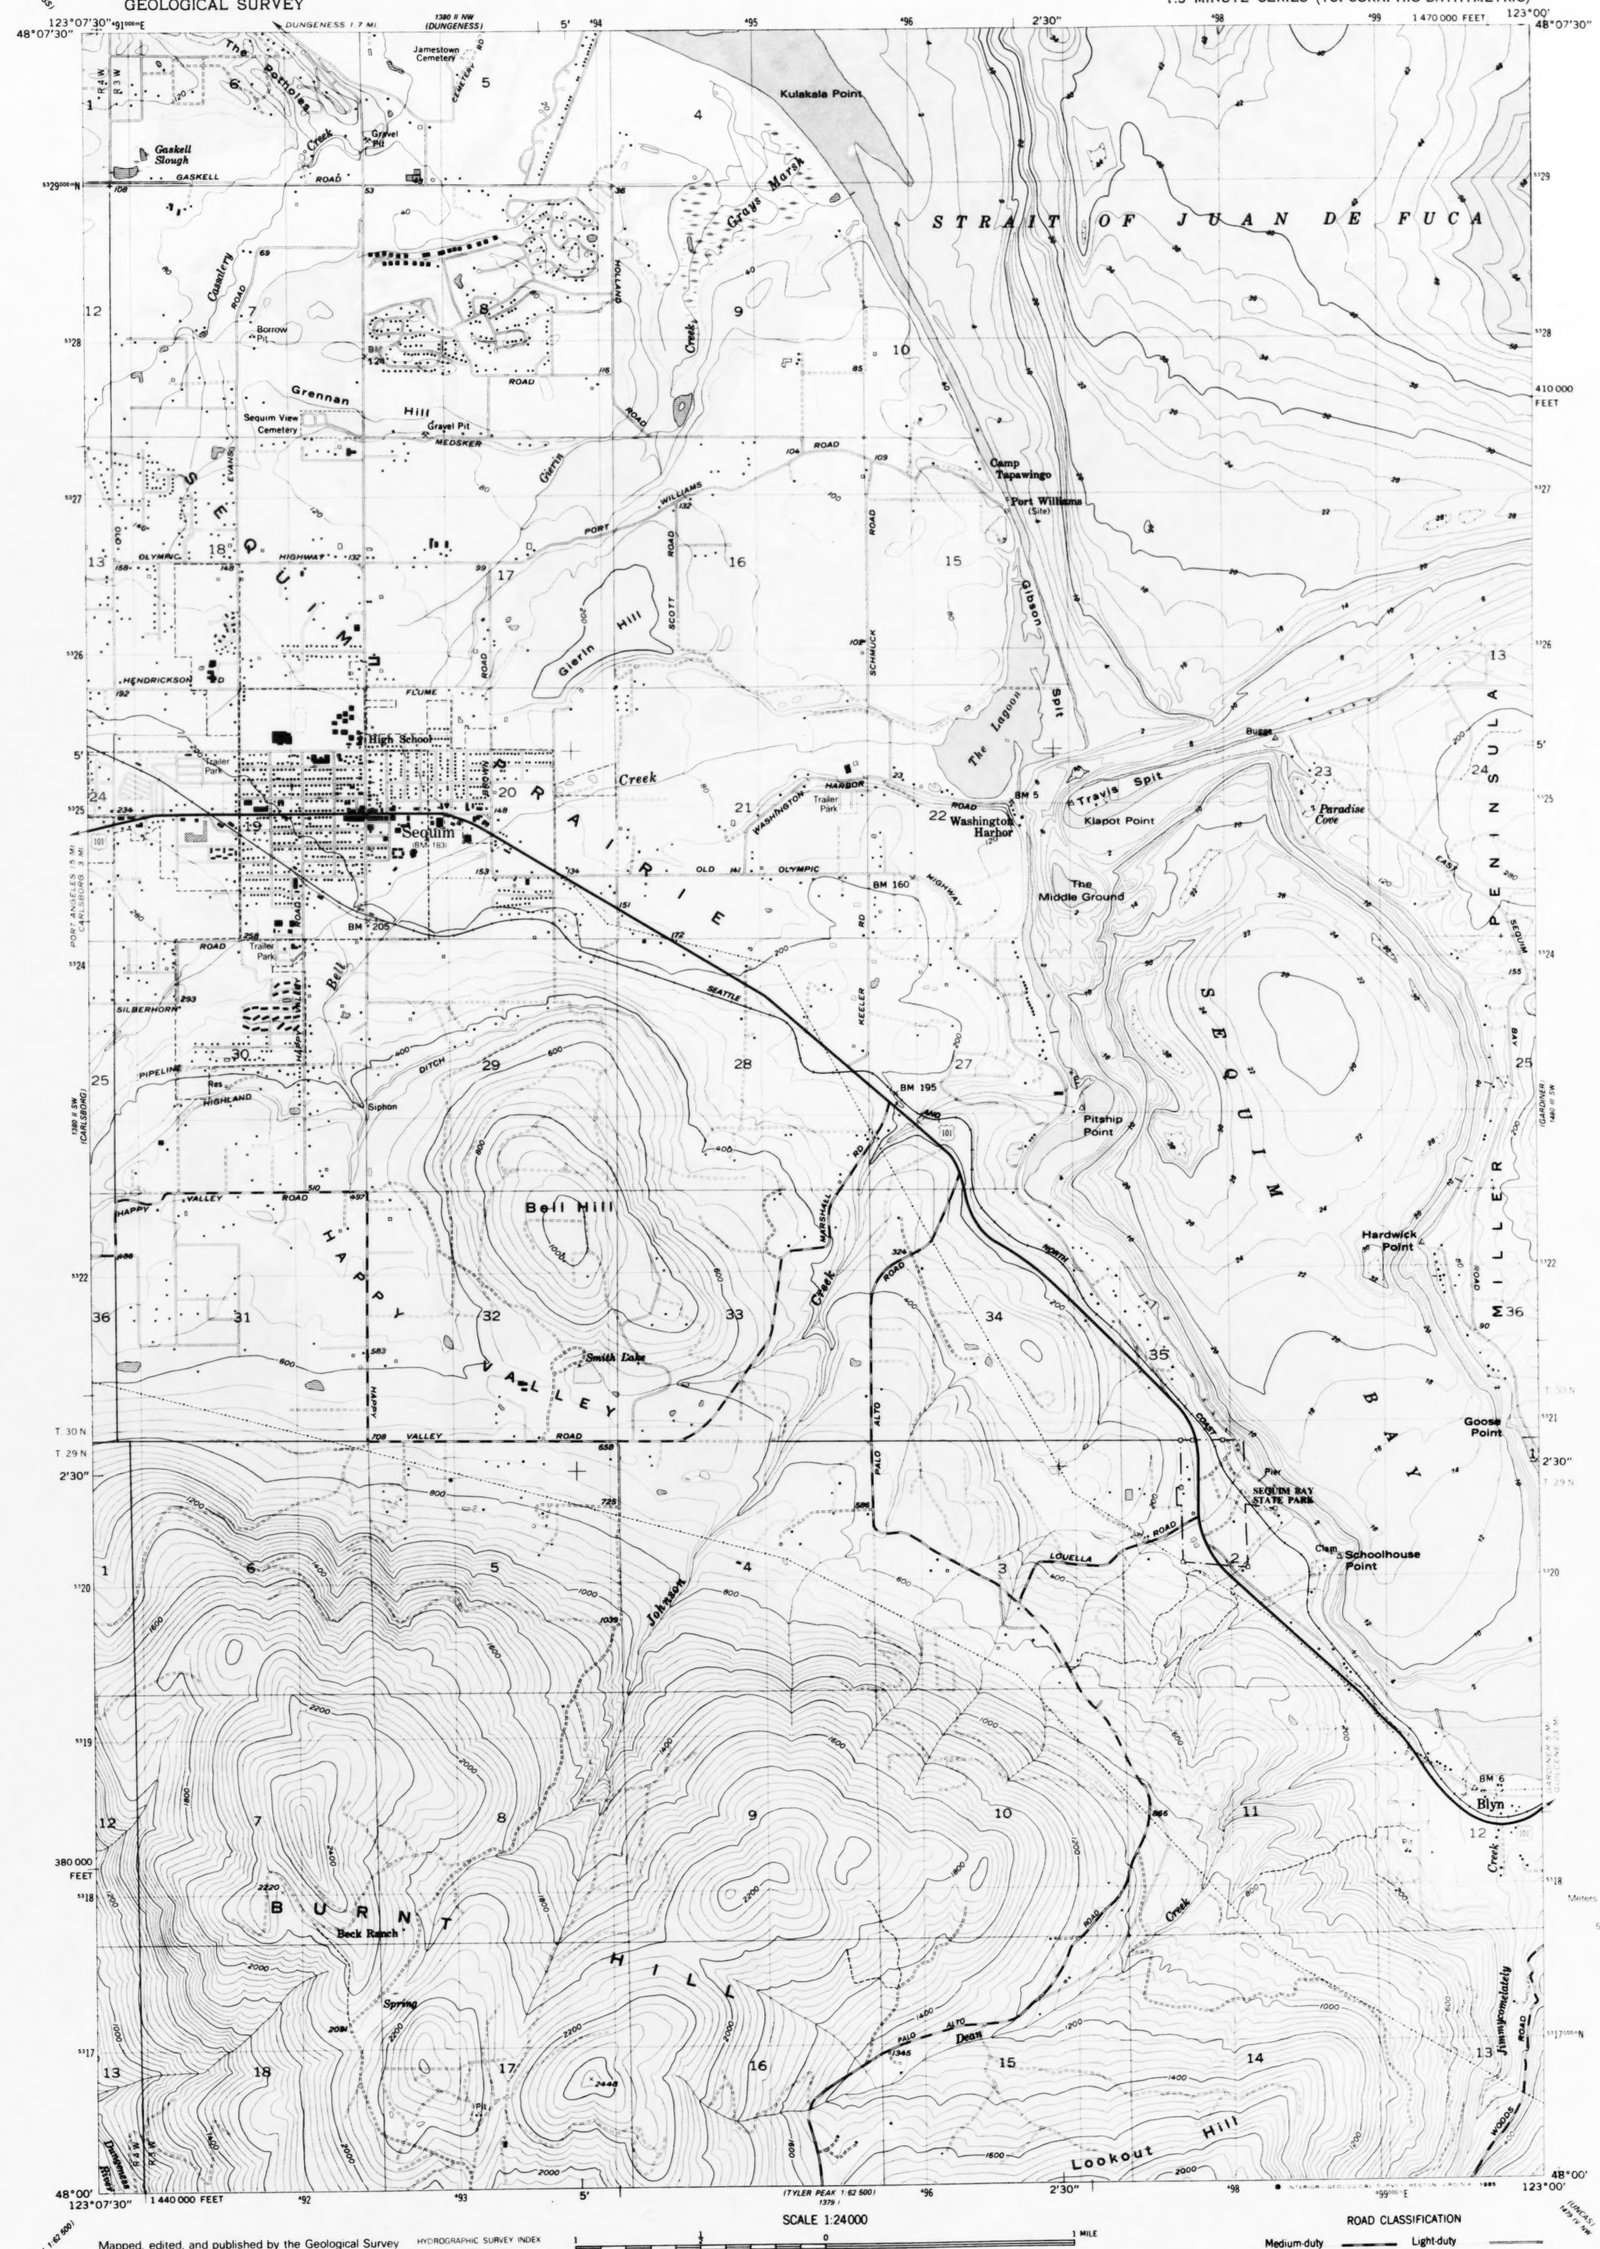

CONVERSION SCALES

Feet	Meters
15000	4500
14000	4000
13000	4000
12000	3500
11000	3000
10000	3000
9000	2500
8000	2000
7000	2000
6000	1500
5000	1500
4000	1000
3000	1000
2000	600
1000	300
0	0

Feet	Meters
1	.3048
2	.6096
3	.9144
4	1.2192
5	1.5240
6	1.8288
7	2.1336
8	2.4384
9	2.7432
10	3.0480

To convert feet to meters multiply by .3048

To convert meters to feet multiply by 3.2808

Exposed at low tide
Meters 0 — 0 Feet
DEPTH GRADIENT
50 — 164
Maximum depth

Mapped, edited, and published by the Geological Survey and the National Ocean Survey

Control by USGS, NOS/NOAA, and USCE

Topography by photogrammetric methods from aerial photographs taken 1954. Field checked 1956

Bathymetry compiled by the National Ocean Survey from tide-coordinated hydrographic surveys. This information is not intended for navigational purposes

Mean lower low water (dotted) line and mean high water (solid) line compiled by NOS from tide-coordinated aerial photographs

Polyconic projection. 1927 North American Datum
10,000 foot grid ticks based on Washington coordinate system, north zone
1000-meter Universal Transverse Mercator grid, zone 10
To place on the predicted North American Datum 1983 move the projection lines 24 meters north and 95 meters east as shown by dashed corner ticks
There may be private inholdings within the boundaries of the National or State reservations shown on this map

Revision shown in purple and woodland compiled from aerial photographs taken 1981 and other sources
Partial field check by U.S. Forest Service.
Map edited 1985

HYDROGRAPHIC SURVEY INDEX



HYDROGRAPHIC SURVEY INFORMATION

Survey Number	Survey Date	Survey Scale	Survey Line Spacing (Naut. Miles)
H-8927	1967	1:20,000	05–10
H-8928	1967	1:10,000	01–30

SCALE 1:24000

1 0 1 MILE
1000 0 1000 2000 3000 4000 5000 6000 7000 FEET
1 5 0 1 KILOMETER

CONTOUR INTERVAL 40 FEET
SUPPLEMENTARY CONTOUR INTERVAL 20 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929
BATHYMETRIC CONTOUR INTERVAL 2 METERS
DATUM IS MEAN LOWER LOW WATER
THE RELATIONSHIP BETWEEN THE TWO DATUMS IS VARIABLE
THE MEAN RANGE OF TIDE IS APPROXIMATELY 1.5 METERS

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
BATHYMETRIC SURVEY DATA COMPLIES WITH INTERNATIONAL HYDROGRAPHIC ORGANIZATION (IHO) SPECIAL PUBLICATION 44 ACCURACY STANDARDS AND/OR STANDARDS USED AT THE DATE OF THE SURVEY

FOR SALE BY U.S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092 AND NATIONAL OCEAN SURVEY, ROCKVILLE, MARYLAND 20852
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

QUADRANGLE LOCATION



UTM GRID AND 1985 MAGNETIC NORTH DECLINATION AT CENTER OF SHEET

ROAD CLASSIFICATION

Medium-duty — Light-duty
Unimproved dirt
U.S. Route — State Route

SEQUIM, WASH.
48123-A1-TF-024
PHOTOREVISED 1985
1956
BATHYMETRY ADDED 1980
DMA 1380 II SE—SERIES V891